

Wireless Sensor Networks


Blink Example

Lecturer: Junseok KIM
<http://usn.konkuk.ac.kr/~jskim>




Introduction of TinyOS

- TinyOS is an unique Operating System (OS) for small wireless sensing devices
- Development environment of TinyOS is Linux
- Windows user uses Cygwin to make virtual linux environment
- C /nesC / python are used for TinyOS programming
- NesC is used mainly

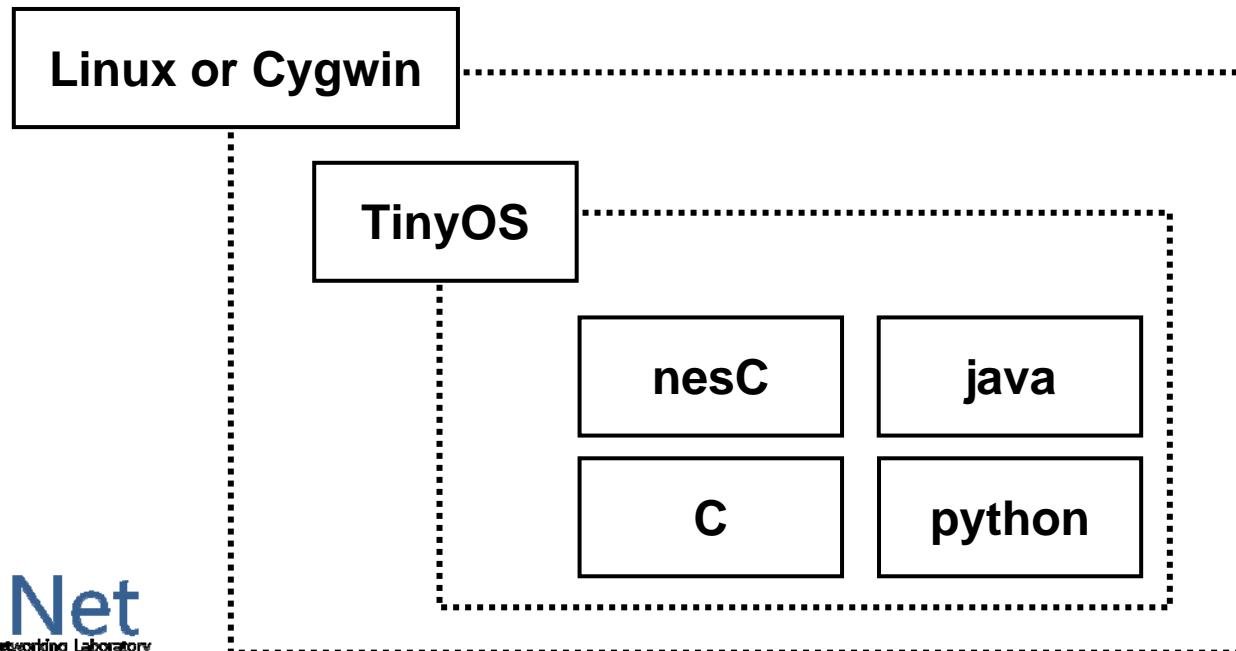

NesC

- NesC is extension of C language and component-based
- A TinyOS program consists of components and interfaces

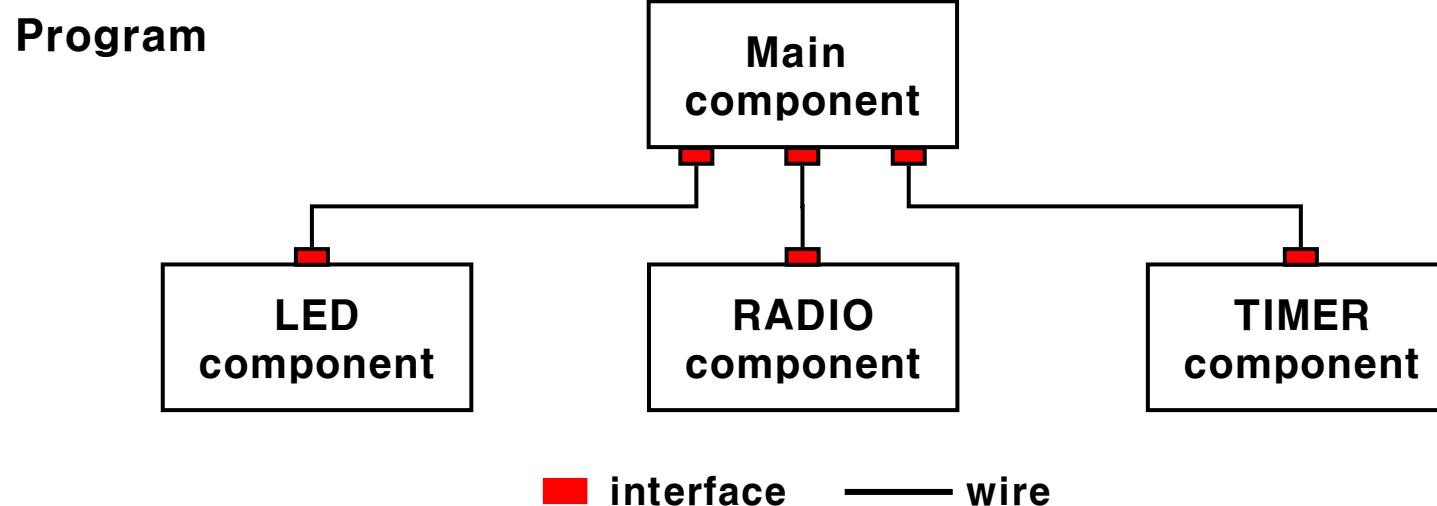

Blink Example


- \$ cd /opt/tinyos-2.x/apps/Blink
- \$ make hybus install

```
Administrator@usn-fb4e2fc75f6:~/opt/tinyos-2.x/apps/Blink
$ make hybus install
mk      compiling BlinkAppC to a hybus binary
ncc -o build/hybus/main.exe -Os -O -mdisable-hwmul -Wall -W
ild/hybus/app.c -board= -DIDENT_PROGRAM_NAME=|"BlinkAppCW"
-DIDENT_USER_HASH=0x9a82d3bdL -DIDENT_UNIX_TIME=0x47d64885L
compiled BlinkAppC to build/hybus/main.exe
    2580 bytes in ROM
    55 bytes in RAM
msp430-objcopy --output-target=ihex build/hybus/main.exe bu
    vri
cp buCompiling & Assembling..il hex.out
    found note on COM55 <using bsl,auto>
    installing hybus binary using bsl
tos-bsl --telos -c 54 -r -e -I -p build/hybus/main.ihex.out
MSP430 Bootstrap Loader Version: 1.39-telos-8
Mass Erase...
Transmit default password ...
Invoking BSL...
Transmit default password ...
Current bootstrap loader version: 1.61 <Device ID: f16c>
Program ...
2612 bytes program
Reset device ... Uploading
rm -f build/hybus/main.exe.out build/hybus/main.ihex.out
```



Flashing downward LEDs indicating serial comm.

during uploading

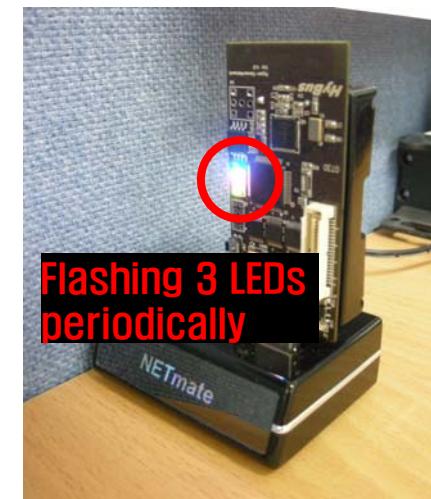


Flashing 3 LEDs periodically

after uploading

Blink Example (Cont.)

- There are three important files:
 - **BlinkAppC.nc** (configuration)
 - **BlinkC.nc** (module)
 - **Makefile** (for gcc complier)

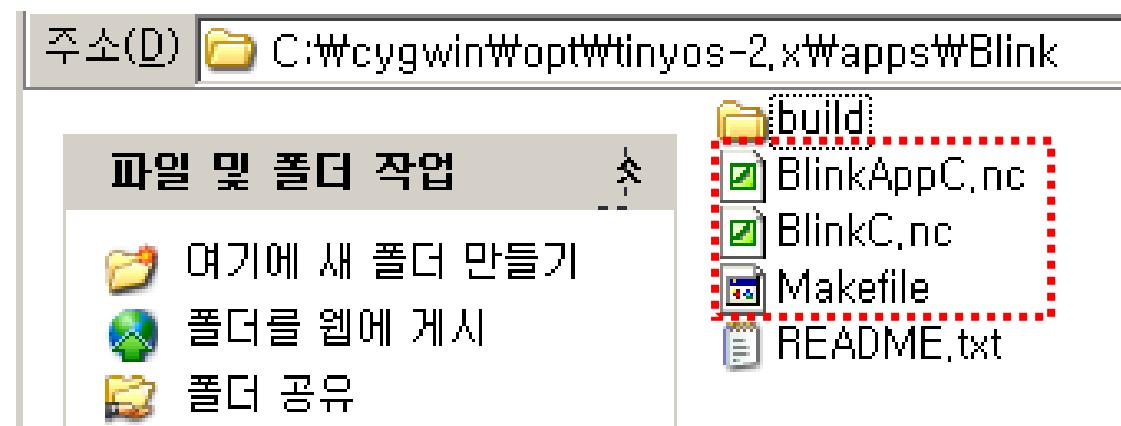


Blink Example (Cont.)

BlinkAppC.nc

```
configuration BlinkAppC
{
}
implementation
{
    components MainC, BlinkC, LedsC;
    components new TimerMilliC() as Timer0;
    components new TimerMilliC() as Timer1;
    components new TimerMilliC() as Timer2;

    BlinkC -> MainC.Boot;
    BlinkC.Timer0 -> Timer0;
    BlinkC.Timer1 -> Timer1;
    BlinkC.Timer2 -> Timer2;
    BlinkC.Leds -> LedsC; // BlinkC -> LedsC.Leds;
}
```

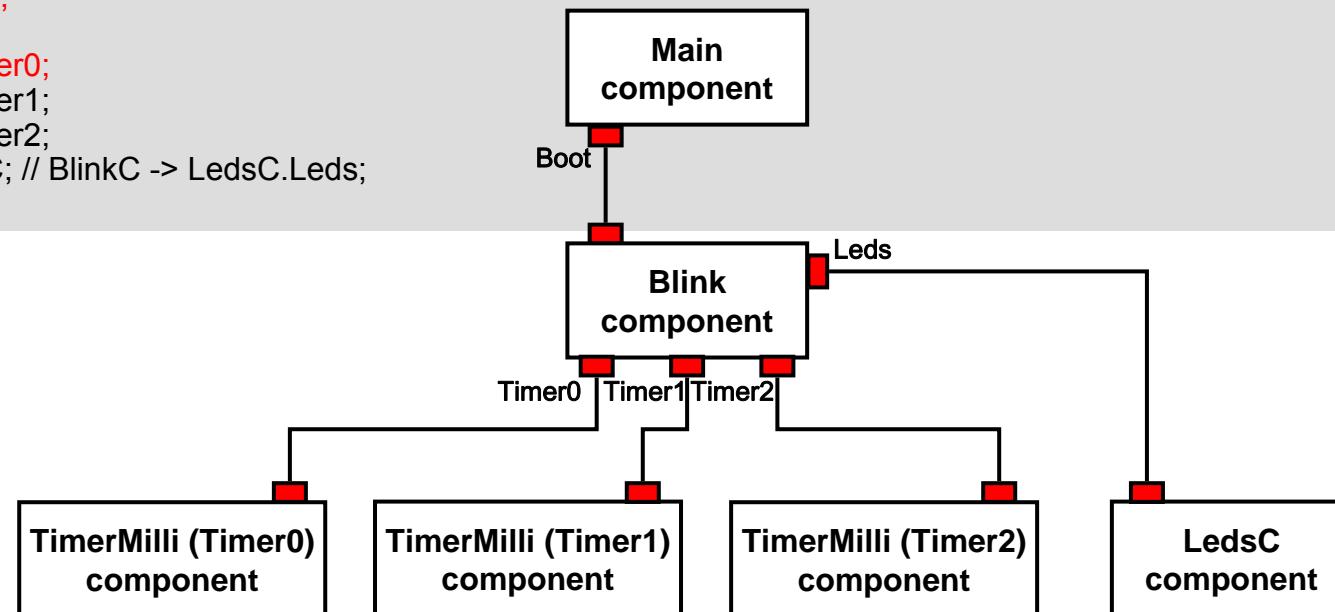

Blink Example (Cont.)

BlinkC.nc

```


module BlinkC @safe()
{
    uses interface Timer<TMilli> as Timer0;
    uses interface Timer<TMilli> as Timer1;
    uses interface Timer<TMilli> as Timer2;
    uses interface Leds;
    uses interface Boot;
}
implementation
{
    event void Boot.booted()
    {
        call Timer0.startPeriodic( 250 );
        call Timer1.startPeriodic( 500 );
        call Timer2.startPeriodic( 1000 );
    }

    event void Timer0.fired()
    {
        dbg("BlinkC", "Timer 0 fired @ %s.\n", sim_time_string());
        call Leds.led0Toggle();
    }


    event void Timer1.fired()
    {
        dbg("BlinkC", "Timer 1 fired @ %s \n", sim_time_string());
        call Leds.led1Toggle();
    }

    event void Timer2.fired()
    {
        dbg("BlinkC", "Timer 2 fired @ %s.\n", sim_time_string());
        call Leds.led2Toggle();
    }
}

```

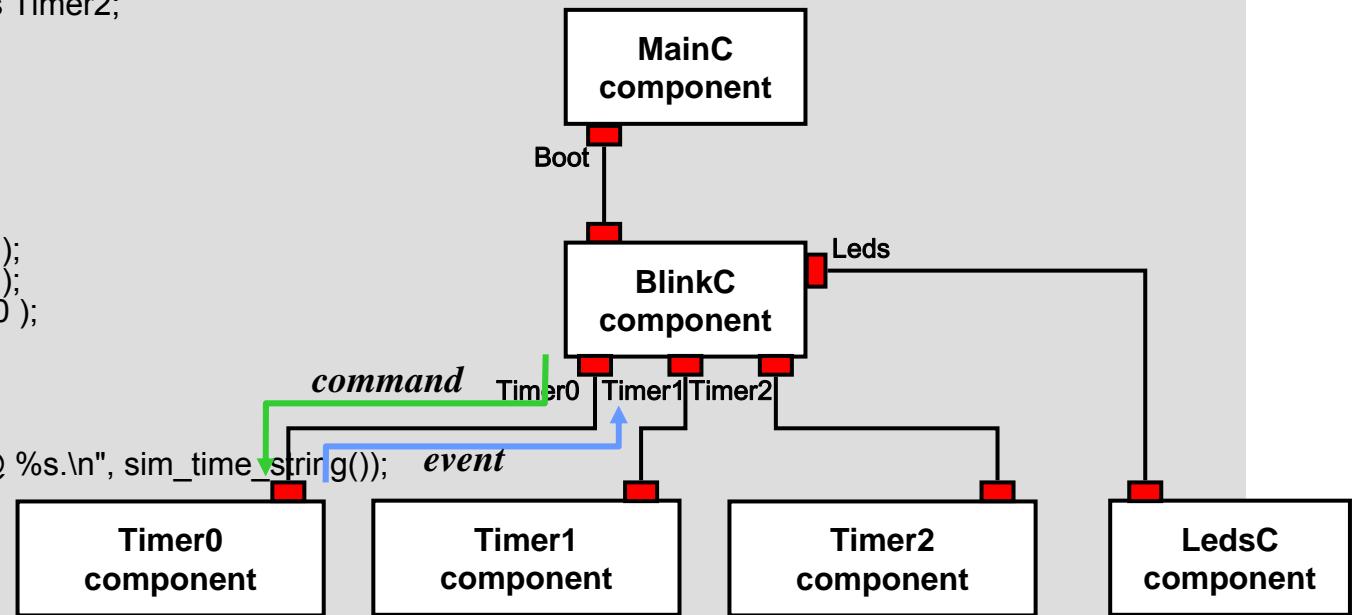

Homework: With a Timer, make a binary counter

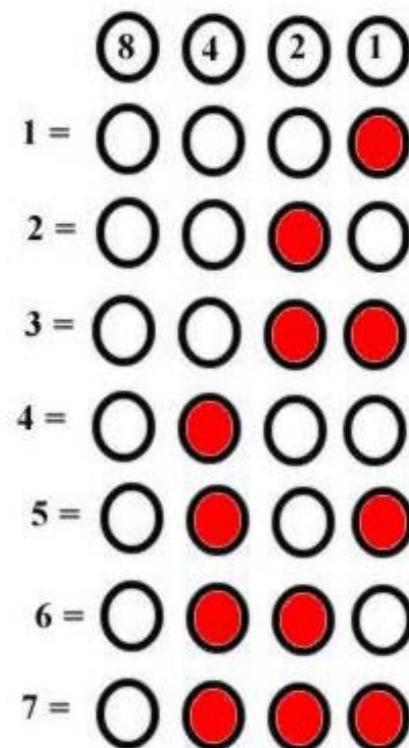

Q and A